




CTR-RS twisting guides represent the perfect solution for flat and squares twisting or for rolled stock stabilizing in case of long distance between stands.


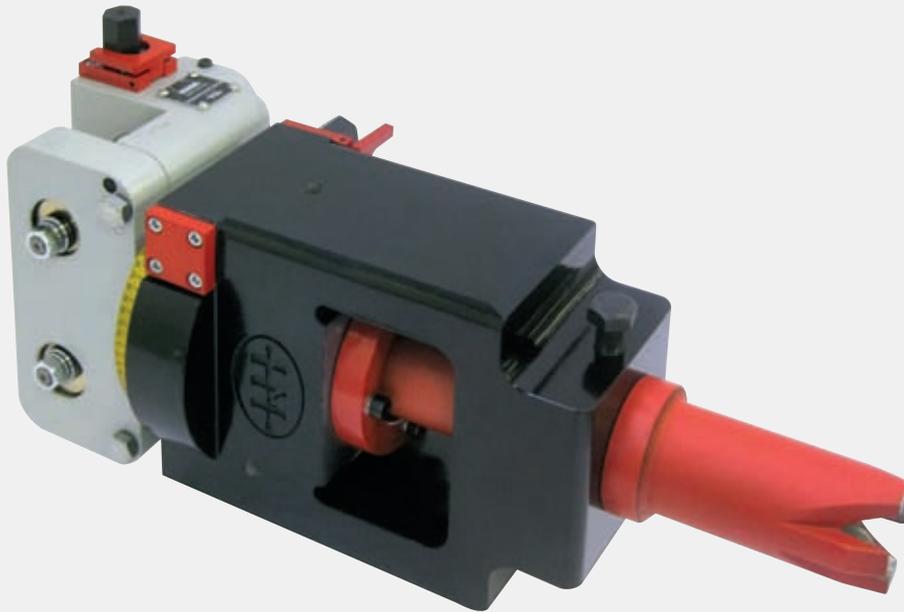


CTR-RS
GUIDE SERIES
>exit twisting
roller guide<

Guide features

- > Compact, simple and heavy-duty design.
- > Single-point adjustment for guide rollers, enabling symmetrical, continuous and precise gap setting optimizing roller utilization.
- > Single-point adjustment of the rotating head for precise setting of the twisting angle.
- > Minimised demand of spare parts and maintenance.

- > Standard Morgårdshammar mounting with possibility to get closer to the rolls to balance the redressing.
- > Suitable for both grease and air/oil lubrication systems.
- > Completely interchangeable with existing CTR guides, including consumable parts.
- > Long-time intervals before maintenance activities, granting long operational time.
- > "Split-type" design for quick and easy roller change.

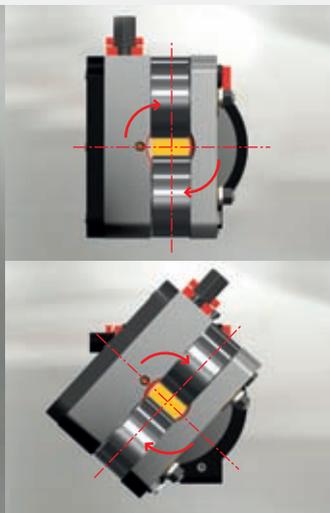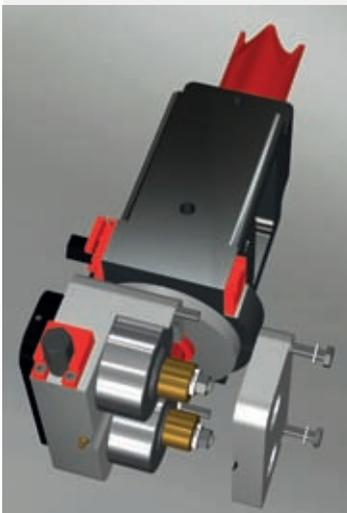



CTR-RS twisting guides represent the perfect solution for flat and squares twisting or for rolled stock stabilizing in case of long distance between stands.

Roller guide	Thickness max/min	H width	A	B	D max dia	E max	E min	F	S	T	U
CTR-45-RS	55 / 0	45	270	117	95	115	95	120	195	255	97.5
CTR-75-RS	70 / 18	75	284	182	110	140	116	165	220	295	110
CTR-120-RS	72 / 18	120	360	207	130	172	148	250	305	330	150

Guide type
CTR-RS

(dimensions in mm)

